

KZ 1080 DFX-T1


Feed Off The Arm Sewing Machine For Jeans



Details



The unique feeding system enables to handle all kind of fabric thicknesses , ranging from 8 ounce elasthan denim fabric to 14 ounce full cotton denim fabric with ease , making it an ideal choice for manufacturers who work with a different range of materials.

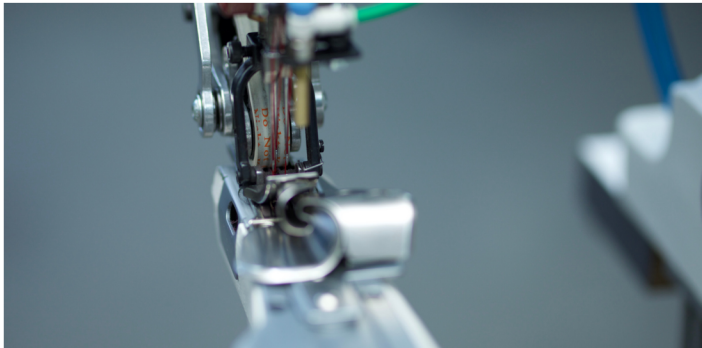


DIFFERENTIAL FEEDING

Stand-alone adjustable differential feeding dog system that provides ease of use for the operator and allows perfect sewing of different fabrics.

FULL OIL LUBRICATION SYSTEM GEARBOX

Full oil lubrication transmission system designed by AGM Special R&D department.

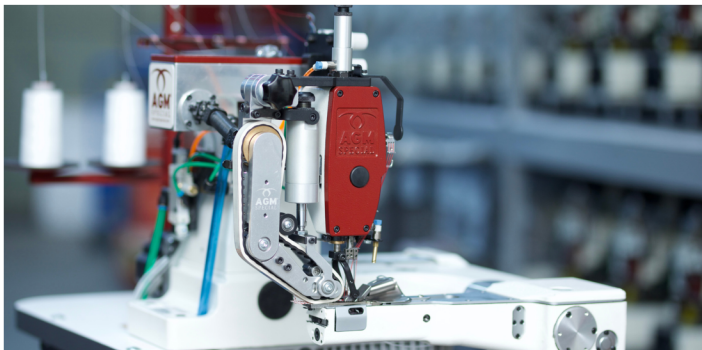

PULLING DEVICE

Movable 3 roller puller system that prevents overlapping the seem and puckering problems in joint areas .

SLIM GAUGE SET

Slim gauge set for light fabrics improved by AGM Special.



Stand-alone adjustable differential feeding system that provides ease of use for the operator and allows perfect sewing of different fabrics.

Full oil lubrication gearbox transmission system.

Movable roller puller system that prevents overlapping the seam and puckering problems in joint areas.

Direct drive servo electronic motor.

Adjustable L type table and stand.

Automatic foot lifter device.

Extra strong needle cooling system.

Special designed guided pressure foot by AGM Special

Automatic double tension mechanism that prevents sharp chain stitch effects.

3 needle chain stitch machine head with full oil lubrication system.

Options

Gauge Set Options

Standard Gauge Set : 1/8"-1/8"

Needle Distance : Minimum 1/8 " , Maximum 1/4 "

Needle No : Minimum 1 , Maximum 3

Gauge Set Size : Minimum 1/8" , Maximum 1/4"


Optional Gauge Sets :

1/8"-1/8" Slim Gauge Set (6.35mm , 3 needle)

3/16" Gauge Set (4.76mm , 2 needle)

9/32" Gauge Set (7.14 mm , 3 needle)

5/32" Gauge Set (4 mm , 2 needle)

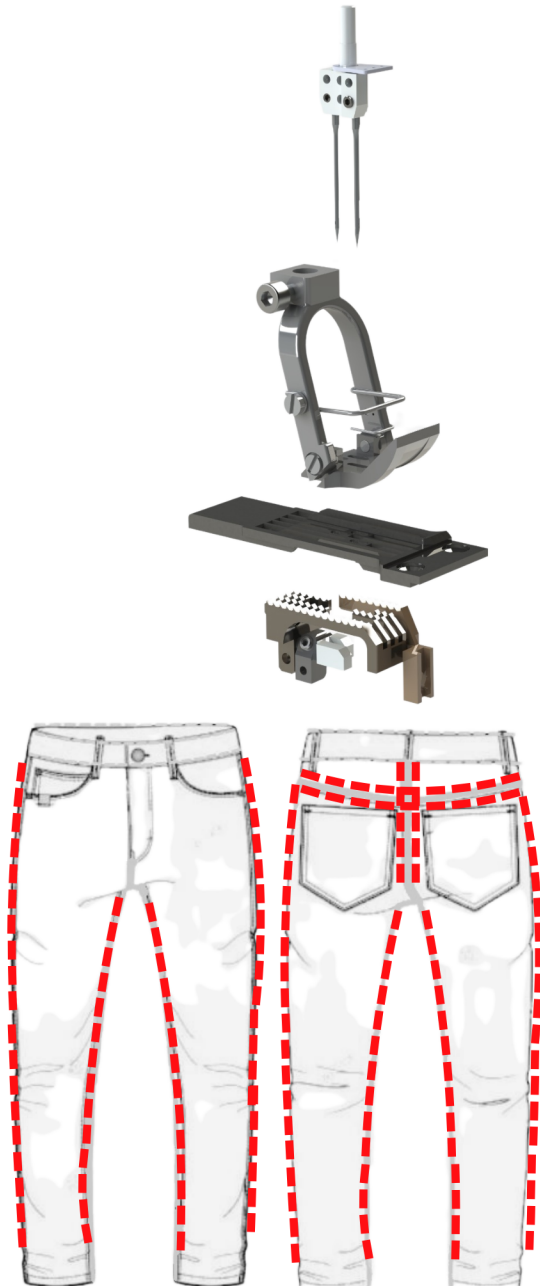

Feeding Mechanism :	Differential feeding	Air Pressure :	6 bar
Machine Head :	3 needle chain stitch	Air Consumption :	3 lt / min
Motor :	Direct drive servo electronic motor	Net Weight :	98 kg
Table and Stand :	Adjustable L type	Gross Weight :	111 kg
Foot Lifter :	Automatic	Dimensions :	60x100x130 cm
Gearbox :	Full oil lubrication transmission system		
Needle Cooling :	Extra strong needle cooling		
Presser Foot :	Guided pressure foot		
Pulling Device :	Movable 3 roller puller system		
Tension Mechanism :	Automatic double tension mechanism		
Maximum Speed :	5000 rpm		
Voltage :	220-240v 60Hz		
Power :	2400-2800w		





www.agmspecial.com

AGM Special Mak. San. Ve Dış Tic. A.Ş
Birlik Mh., Karaoğlanoğlu Cd. 7/A, 34230
Esenler/İstanbul Türkiye

Asil Grup Mak. San. Ve Dış Tic. Ltd. Şti.
İkitelli O.S.B. Süleyman Demirel Bulv. İş Modern San. Sit. G:11-12
Başakşehir/İstanbul Türkiye

